

1162 RECEIVED

APR 03 2002

WATER WELL REPORT

STATE OF WASHINGTON

Start Card No. W125730
Unique Well I.D.# AKF295
Water Right Permit No.

ISLAND CO HEALTH DEPT.

ADDRESS: 4716 83 AVE S. E., Snohomish 98290

(1) OWNER: JOE & ARRON FIRCHAU

SW 1/4 NE 1/4 Sec 34 T 33 N, R 02 WM

(2) LOCATION OF WELL: County: ISLAND

(2a) STREET ADDRESS OF WELL (or nearest Address): DEEP RIDGE ROAD OAK HARBOR, WA R233343373160

(3) PROPOSED USE: X Domestic Industrial Municipal
Irrigation TEST WELL Other....
DeWater

(10) WELL LOG or ABANDONMENT PROCEDURE DESCRIPTION:

(4) TYPE OF WORK: Owner' No of Well if more than one: 1
Abandoned New Well..... X METHOD Dug... Bored.
Deepened..... Cable. Driven
Reconditioned Rotary X

Formation: Describe by color, character, size of material and show thickness of aquifers and the kind of nature of the material in each stratum penetrated, with at least one entry for each change of information.

(5) DIMENSIONS: Diameter of well 6 inches.
Drilled 310.00 Feet Depth of completed well 307.00 Ft.

MATERIAL	FROM	TO
TOP SOIL	00	01
TILL, BROWN SANDY SILTY	01	63

(6) CONSTRUCTION DETAILS:
Casing Installed: Diam From Ft To Ft
Welded X 6 Diam From +2 Ft To 198 Ft
Liner Inst X 4 Diam From 10 Ft To 260 Ft
Threaded X

CLAY, TANNISH GRAYISH-BROWN, SILTY	63	177
SAND, FINE, BROWN	177	190
GRAVEL COARSE, LOST CIRC	190	194
GRAVEL FINE SILTY-SAND FINE, BROWN	194	250
GRAVEL FINE W/25% TAN CLAY	250	261

Perforations: NO
Types of perforator used
Size of perforations Inches, by Inches
Perforations from ft to
Perforations from ft to
Perforations from ft to

SAND FINE, BROWN	261	280
SAND, COARSE BROWNISH-BLACKISH	280	290
FINE GRAVEL BROWN	290	307
CLAY BLUE	307	310

Screens: YES
Manufacturer's Name: WESTERN WELL SCREEN
Type: PVC Model No.
Diam 4 Slot size 15 From 260 Ft To 307 Ft
Diam 4 Slot size From Ft To

THIS WELL CONFORMS TO ISLAND COUNTY
HEALTH DEPT RULE 809.07 C.D. & E.

Gravel packed: YES Size of gravel: 8-12
Gravel placed from: 180 Ft To: 307 Ft

Surface seal: YES To What Depth?: 198 Ft
Material used in seal BENTONITE
Did any strata contain unusable water?: YES
Type of water: LOW VOLUME Depth of strata: 173 Ft
Method of sealing strata off: CASING & BENTONITE

(7) PUMP: Manufacturer's Name: FLINT & WALLING
Type: SUBMERSIBLE H.P. 3

(8) WATER LEVELS? Above mean sea level 450
Static Level 261 Ft. below top of well Date: 03/01/02
Artesian pressure Lbs. per square inch Date: / /
Artesian water is controlled by:

Work Started 01/07/02 Work Completed 03/01/02

(9) WELL TESTS: SEE ATTACHMENTS:
Drawdown is amount water level is lowered below static level
Was a pump test made?: YES If yes, by whom?: HIMEBAUGH DRILL
Yield: Gal/min. with Ft drawdown after Hrs.
Yield: Gal/min. with Ft drawdown after Hrs.
Yield: Gal/min. with Ft drawdown after Hrs.
RECOVERY DATA
Time Water Level Time Water Level Time Water Level

WELL CONSTRUCTOR CERTIFICATION:
I constructed and/or accept responsibility for construction of this well, and its compliance with all Washington well construction standards. Materials used and the information reported above are true to the best knowledge and belief.

Name: HIMEBAUGH DRILLING - BOYD HIMEBAUGH

Address: 828 B PORTAGE STREET, ARLINGTON, WA 98223

(Signed) *Boyd Himebaugh* License No 1877
Contractors
Registration
No. HIMEBD099CK

Date 03/10/02

Date of test 03/01/02
Bailer Test 8+ gal/min with 5 ft. drawdown after 2 Hrs
Airtest gal/min with stem set at ft for Hrs
Artesian flow G.P.M. Date / /

256399
WATER WELL REPORT
STATE OF WASHINGTONActual tag on well
AFK 295Start Card No. W125730
Unique Well I.D.# AKF295
Water Right Permit No.

1) OWNER: JOE & ARRON FIRCHAU		ADDRESS: 4716 83 AVE S. E., Snohomish 98290																																											
2) LOCATION OF WELL: County: ISLAND		SW 1/4 NE 1/4 Sec 34 T 33 N, R 02 WM																																											
2a) STREET ADDRESS OF WELL (or nearest Address): DEEP RIDGE ROAD OAK HARBOR, WA R233343393160																																													
3) PROPOSED USE: X Domestic Industrial Municipal Irrigation DeWater TEST WELL Other....		(10) WELL LOG or ABANDONMENT PROCEDURE DESCRIPTION:																																											
1) TYPE OF WORK: Owner' No of Well if more than one: 1 Abandoned New Well..... X METHOD Dug... Bored. Deepened..... Cable. Driven Reconditioned Rotary X		Formation: Describe by color, character, size of material and show thickness of aquifers and the kind of nature of the material in each stratum penetrated, with at least one entry for each change of information.																																											
5) DIMENSIONS: Diameter of well 6 inches. Drilled 310.00 Feet Depth of completed well 307.00 Ft.		<table border="1"><thead><tr><th>MATERIAL</th><th>FROM</th><th>TO</th></tr></thead><tbody><tr><td>TOP SOIL</td><td>00</td><td>01</td></tr><tr><td>TILL, BROWN SANDY SILTY</td><td>01</td><td>63</td></tr><tr><td>CLAY, TANNISH GRAYISH-BROWN, SILTY</td><td>63</td><td>177</td></tr><tr><td>SAND, FINE, BROWN</td><td>177</td><td>190</td></tr><tr><td>GRAVEL COARSE, LOST CIRC</td><td>190</td><td>194</td></tr><tr><td>GRAVEL FINE SILTY-SAND FINE, BROWN</td><td>194</td><td>250</td></tr><tr><td>GRAVEL FINE W/25% TAN CLAY</td><td>250</td><td>261</td></tr><tr><td>SAND FINE, BROWN</td><td>261</td><td>280</td></tr><tr><td>SAND, COARSE BROWNISH-BLACKISH</td><td>280</td><td>290</td></tr><tr><td>FINE GRAVEL BROWN</td><td>290</td><td>307</td></tr><tr><td>CLAY BLUE</td><td>307</td><td>310</td></tr><tr><td>@238 FEET PRODUCES 1.5 GPM</td><td>.</td><td>.</td></tr><tr><td>THIS WELL CONFORMS TO ISLAND COUNTY HEALTH DEPT RULE 809.07 C.D. & E.</td><td>.</td><td>.</td></tr></tbody></table>		MATERIAL	FROM	TO	TOP SOIL	00	01	TILL, BROWN SANDY SILTY	01	63	CLAY, TANNISH GRAYISH-BROWN, SILTY	63	177	SAND, FINE, BROWN	177	190	GRAVEL COARSE, LOST CIRC	190	194	GRAVEL FINE SILTY-SAND FINE, BROWN	194	250	GRAVEL FINE W/25% TAN CLAY	250	261	SAND FINE, BROWN	261	280	SAND, COARSE BROWNISH-BLACKISH	280	290	FINE GRAVEL BROWN	290	307	CLAY BLUE	307	310	@238 FEET PRODUCES 1.5 GPM	.	.	THIS WELL CONFORMS TO ISLAND COUNTY HEALTH DEPT RULE 809.07 C.D. & E.	.	.
MATERIAL	FROM	TO																																											
TOP SOIL	00	01																																											
TILL, BROWN SANDY SILTY	01	63																																											
CLAY, TANNISH GRAYISH-BROWN, SILTY	63	177																																											
SAND, FINE, BROWN	177	190																																											
GRAVEL COARSE, LOST CIRC	190	194																																											
GRAVEL FINE SILTY-SAND FINE, BROWN	194	250																																											
GRAVEL FINE W/25% TAN CLAY	250	261																																											
SAND FINE, BROWN	261	280																																											
SAND, COARSE BROWNISH-BLACKISH	280	290																																											
FINE GRAVEL BROWN	290	307																																											
CLAY BLUE	307	310																																											
@238 FEET PRODUCES 1.5 GPM	.	.																																											
THIS WELL CONFORMS TO ISLAND COUNTY HEALTH DEPT RULE 809.07 C.D. & E.	.	.																																											
5) CONSTRUCTION DETAILS: Casing Installed: Diam From Ft To Ft Welded X 6 Diam From +2 Ft To 198 Ft Liner Inst X 4 Diam From 10 Ft To 260 Ft Threaded X Perforations: NO Types of perforator used Size of perforations Inches, by Inches Perforations from ft to Perforations from ft to Perforations from ft to Screens: YES Manufacturer's Name: WESTERN WELL SCREEN Type: PVC Model No. Diam 4 Slot size 15 From 260 Ft To 307 Ft Diam 4 Slot size From Ft To Ft Gravel packed: YES Size of gravel: 8-12 Gravel placed from: 180 Ft To: 307 Ft Surface seal: YES To What Depth?: 198 Ft Material used in seal BENTONITE Did any strata contain unusable water?: YES Type of water: LOW VOLUME Depth of strata: 173 Ft Method of sealing strata off: CASING & BENTONITE																																													
7) PUMP: Manufacturer's Name: FLINT & WALLING Type: SUBMERSIBLE H.P. 3																																													
3) WATER LEVELS? Above mean sea level 450 Static Level 261 Ft. below top of well Date: 03/01/02 Artesian pressure Lbs. per square inch Date: / / Artesian water is controlled by:		Work Started 01/07/02 Work Completed 03/01/02																																											
2) WELL TESTS: SEE ATTACHMENTS: Drawdown is amount water level is lowered below static level Was a pump test made?: YES If yes, by whom?: HIMEBAUGH DRILL Yield: Gal/min. with Ft drawdown after Hrs. Yield: Gal/min. with Ft drawdown after Hrs. Yield: Gal/min. with Ft drawdown after Hrs. RECOVERY DATA Time Water Level Time Water Level Time Water Level Date of test 03/01/02 Bailer Test 8+ gal/min with 5 ft. drawdown after 2 Hrs Airtest gal/min with stem set at ft for Hrs Artesian flow G.P.M. Date / / Temperature of Water 48.2 Was a chemical analysis made?: YES		WELL CONSTRUCTOR CERTIFICATION: I constructed and/or accept responsibility for construction of this well, and its compliance with all Washington well construction standards. Materials used and the information reported above are true to the best knowledge and belief. Name: HIMEBAUGH DRILLING - BOYD HIMEBAUGH Address: 828 B PORTAGE STREET, ARLINGTON, WA 98223 (Signed) <i>Boyd Himebaugh</i> License No 1877 Contractors Registration No. HIMEBD099CK Date 03/10/02																																											

The Department of Ecology does NOT Warranty the Data and/or the Information on this Well Report.



Well Tagging Form

RECEIVED

MAR 23 2007

DEPT. OF ECOLOGY

Unique Well Tag No:

WS# AA5694/SOI

AFK 295

RECORD VERIFICATION (check one)

☒

Well Report available (please attach this form to the well report and submit it to the Ecology Regional Office near you)

☐

Verification inconclusive

☐

Well Report not available

Joe and Aaron Firchan
Owner at time of Well Drilling.

WELL OWNERSHIP IF DIFFERENT FROM WELL REPORT

First Name:

Deer Ridge Road Water System

Last Name:

Street Address:

c/o King Water Co PO Box 2243

City:

Oak Harbor

State:

WA 98277

LOCATION OF WELL IF DIFFERENT FROM WELL REPORT

Well Address:

Parcel R23334-339-3160 Blackberry Lane

City:

Oak Harbor

County:

Island

33 N. R. 02

E

W.M. Sec.

34

SW

1/4 of the

NE

FOR AGENCY USE ONLY

Latitude

N 41.8 18.29.75

Longitude

W 122.32.31.22

(Readings taken at well with hand-held GPS)

Elevation at land surface

feet/meters (circle one)

☒

GPS

☐

Topographic Map

☐

Survey

☐

Computer generated

☐

Digital Altimeter

☐

Topographic Map

☐

Other

Additional information, if available:

☐

Location marked on topographic map (please attach)

☐

Location marked on air photo (please attach)

FOR AGENCY USE ONLY

WELL CHARACTERISTICS

Physical Description of well (size of casing, type of well, housing, etc.)

6" Casing with turtle cap. Free-standing
5 feet south of pump house

Location of Well identification Tag:

Fastened to well casing

Was supplemental tag needed for ease of identifying well?

☐ Yes

☒ No

If yes, where was tag placed?

D	C	B	A
E	F	G	H
M	L	K	J
N	P	Q	R

Scale 1:24,000 (1"=2,000')

Indicate the location of the well within the Section by drawing a dot at that point.

SECTION 34 (G)

well

COMMENTS:

Actual tag on well is AFK 295.

It is not AKF 295 as erroneously reported on the well log.

FOR ECOLOGY WATER RESOURCES PROGRAM ONLY

Water Right #

Date Issued

Circle One:

Application

Permit


Certificate

Claim

Exempt

N.E. 1/4, Sec. 34, Twp. 33 N., R. 2 E., W.M.

DO NOT USE AS A LEGAL DOCUMENT
ACCURACY NOT GUARANTEED

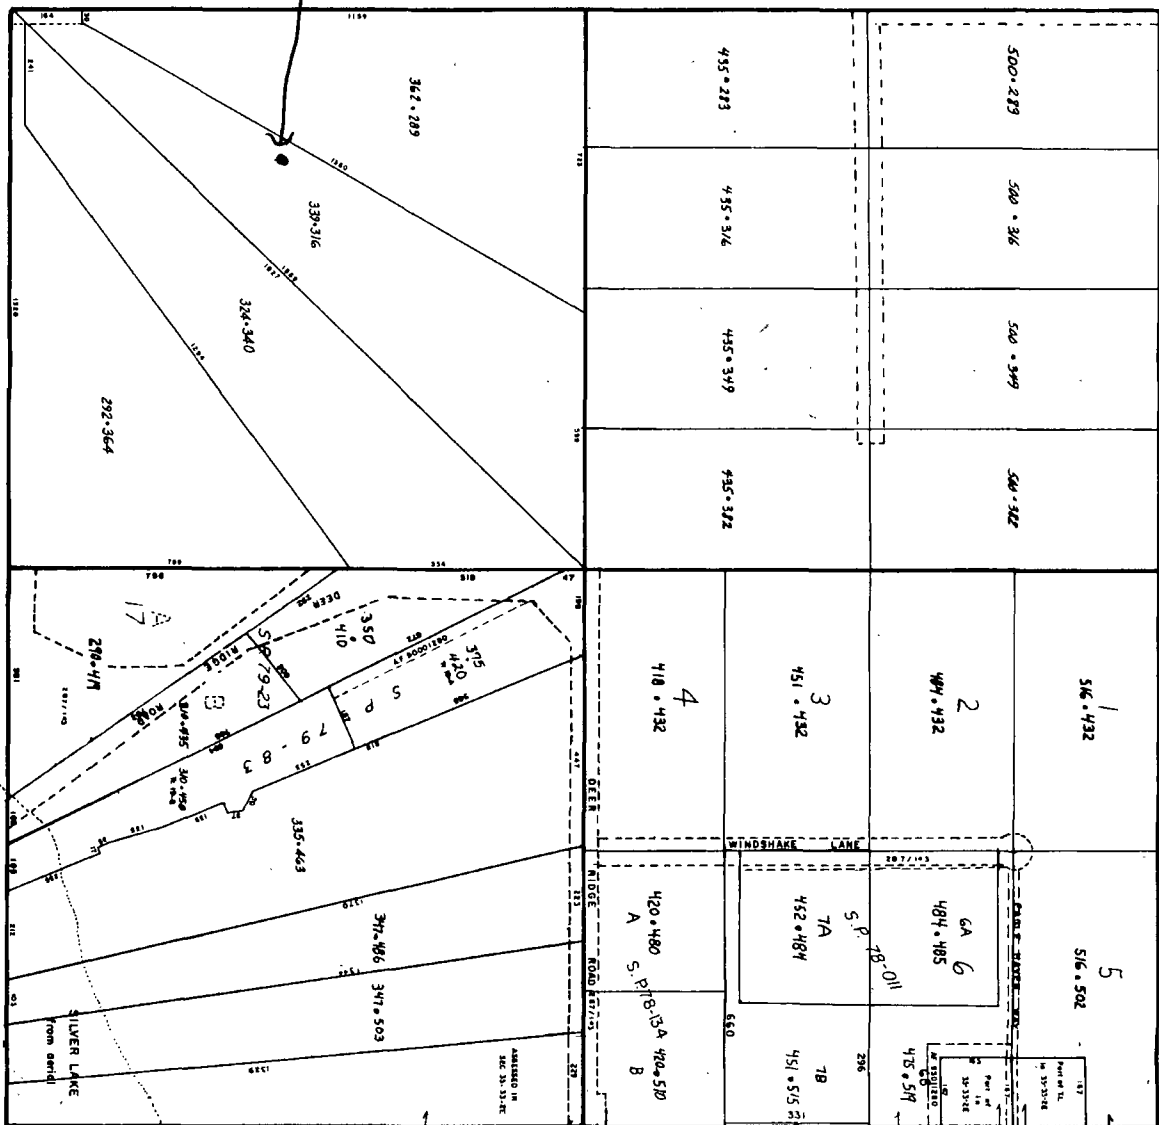

658

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0

280 270 260 250 240 230 220 210 200 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10 0